


Enquiry Order


Reference no. (Customer):

Customer no.:	<input type="text"/>	Order address:	<input type="text"/>
Customer:	<input type="text"/>		<input type="text"/>
Contact person:	<input type="text"/>	Delivery address:	<input type="text"/>
Telephone:	<input type="text"/>		<input type="text"/>
E-mail:	<input type="text"/>	Requested delivery date:	<input type="text"/>


Edscha TS CS-Hybrid Roof




Profile CS-Hybrid Standard *




Profile CS-Hybrid Volumen *



Profile CS-Hybrid Universal *



Profile CS-Hybrid Universal Classic *



Profile CS-Hybrid Small *
(max. 8,5 m)

* Standard version in accordance with the current product description. Aluminium roof profiles are not included in the scope of delivery.

Basic roof

- Basic roof CS-Hybrid Standard (one-sided moving)
- Basic roof CS-Hybrid – Bidirectional moving (B)
- Basic roof CS-Hybrid Standard Small (one-sided moving)
- Basic roof CS-Hybrid Small Bidirectional moving (B)

Roof length:

Quantity of roofs with identical parameters Pcs.

Standard body width:

2550 mm

Optional special width:

mm

Options

Automatic adjustment mechanism

- Automatic adjustment mechanism (1 x 1000 N per side) for heavy customer-specific endings
- Automatic adjustment mechanism with locking, rear

TIR-Kit

Bows

- Bows with roof pitch (25 mm)
- DB design (for roof width 2550), reinforced bows **

E-Drive (Attention: longer delivery times!)

Roof reinforcement

- Roof reinforcement 4-belt system (XL version acc to EN 12642)
- Roof reinforcement 8-belt system (XL version acc to EN 12642)

Consultation QuickCurtain (eigener Bestellbogen)
Attention: longer delivery times!


** DB design (suitable for combined transport and checked by Deutsche Bahn) (suitable for EN 283)

Endings

- Without endings**
- End bow BG without locking assembly** Pcs.
- Gantry beam Standard 130 mm cpl.** Pcs.
- Gantry beam Standard 190 mm cpl.** Pcs.
- Adapter** (Rear end customer specific) including screws and screw nuts
- Cable-locking mechanism for clearance on both sides (front wall outside)**

Tailwing

- TailWing 400-900
- TailWing 901-1200

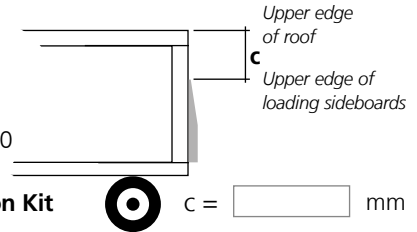

Tailwing-Construction Kit

- TW-Construction Kit 400-900
- TW-Construction Kit 901-1200

c = mm

Optional accessories

Assembly kits (including clamping strips)

- | | | |
|--------------------------------|--------------------------------|-------------------------------|
| Assembly kit Volume | front <input type="checkbox"/> | rear <input type="checkbox"/> |
| Assembly kit Standard | front <input type="checkbox"/> | rear <input type="checkbox"/> |
| Assembly kit Universal | front <input type="checkbox"/> | rear <input type="checkbox"/> |
| Assembly kit Universal Classic | front <input type="checkbox"/> | rear <input type="checkbox"/> |

Clamping strip kits

- Clamping strip kit (Standard/Volume/Universal) front
- Clamping strip kit (Universal Classic) front or rear
- Clamping strip kit (Standard/Universal) rear
- Clamping strip kit (Volume) rear

Side tarpaulin roller

- | | | | |
|--|---------------------------|--|---------------------------|
| <input type="checkbox"/> Tarpaulin Roller with Clip ¹⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Side Tarpaulin Roller (1) (Universal Classic) ²⁾ | <input type="text"/> Pcs. |
| <input type="checkbox"/> Tarpaulin Roller without Clip ¹⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Belt Roller (Universal Classic) ²⁾ | <input type="text"/> Pcs. |
| <input type="checkbox"/> Side tarpaulin roller SPR-4 ¹⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Side Tarpaulin Roller (2) (Universal Classic) ²⁾ | <input type="text"/> Pcs. |
| <input type="checkbox"/> Tarpaulin deflector plate (kit) ¹⁾ | <input type="text"/> Pcs. | | |

1) Not suitable for Universal Classic
2) Only suitable for Universal Classic

Stanchion roller carrier

- | | | | |
|---|---------------------------|---|---------------------------|
| <input type="checkbox"/> Stanchion roller carrier CS 125 / CS 175 ¹⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Roller with flap (d) ²⁾ | <input type="text"/> Pcs. |
| <input type="checkbox"/> Stanchion roller carriage rotatable (b) ²⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Stanchion roller carrier (e) ²⁾ | <input type="text"/> Pcs. |
| <input type="checkbox"/> Stanchion roller carrier (to be used with curtain roller 40 38 031 360 only) (c) ²⁾ | <input type="text"/> Pcs. | <input type="checkbox"/> Stanchion roller carrier (f) ²⁾ | <input type="text"/> Pcs. |
| | | <input type="checkbox"/> Stanchion roller carrier (g) ²⁾ | <input type="text"/> Pcs. |

PVC pelmet

Standard/Universal

- grey black

Roll

13700 x 125 mm Pcs.

18500 x 125 mm Pcs.

Volume

- grey black

Roll

13700 x 110 mm Pcs.

18500 x 110 mm Pcs.

Universal Classic

- grey black

Roll

14000 x 120 mm Pcs.

33000 x 120 mm Pcs.

Meter

33000 x 120 mm m